




GELATO Update 5/3/24

Liam Sherman



Comparing Anomaly Scores

For a background rejection of 10^{-5}

For signal background:

3 events passed A2

2 events passed B2

2 events passed A3




2 events passed A2 and B2

1 events passed A2 and A3

2 events passed A3 and B2


3 events passed 1 or more models

1 events passed all models

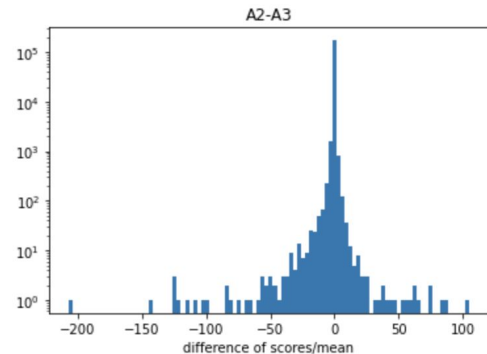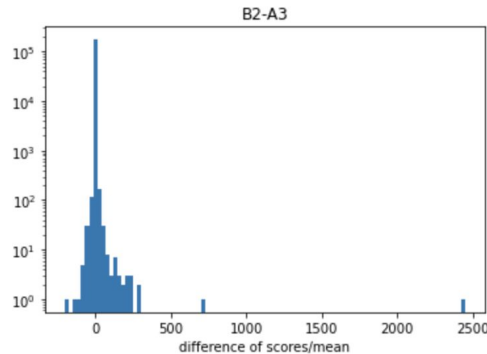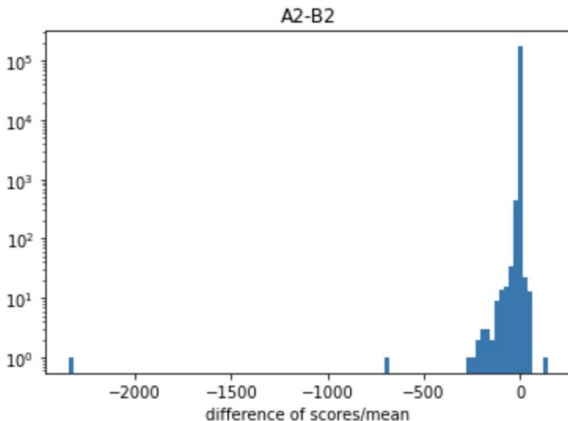


Finding Hyperparameter Dependencies

SLAC

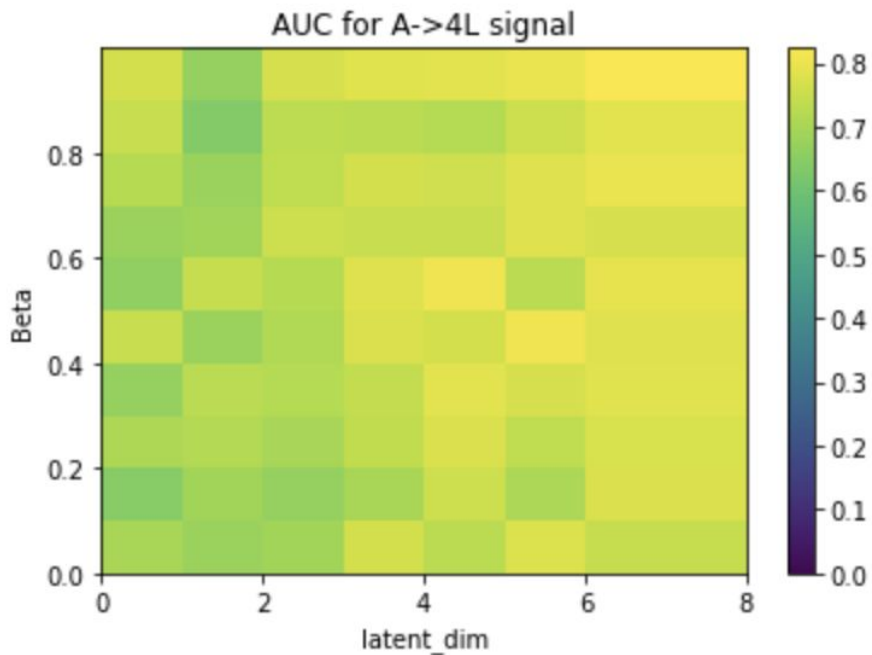


Topo 2A (lemon)

SLAC

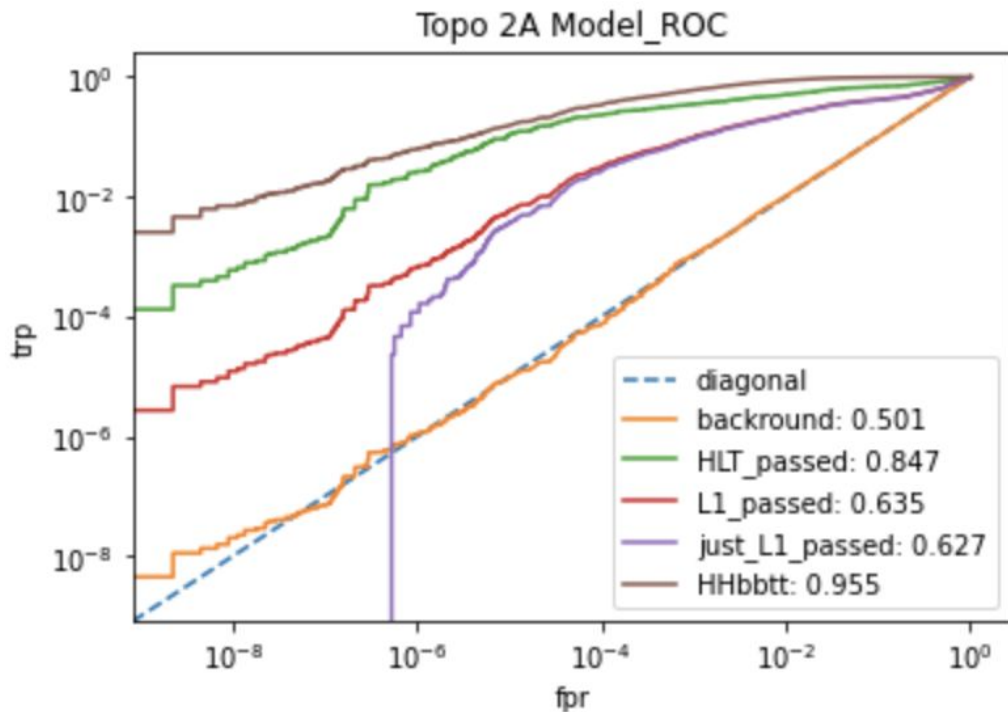

Topo 2B (chocolate)

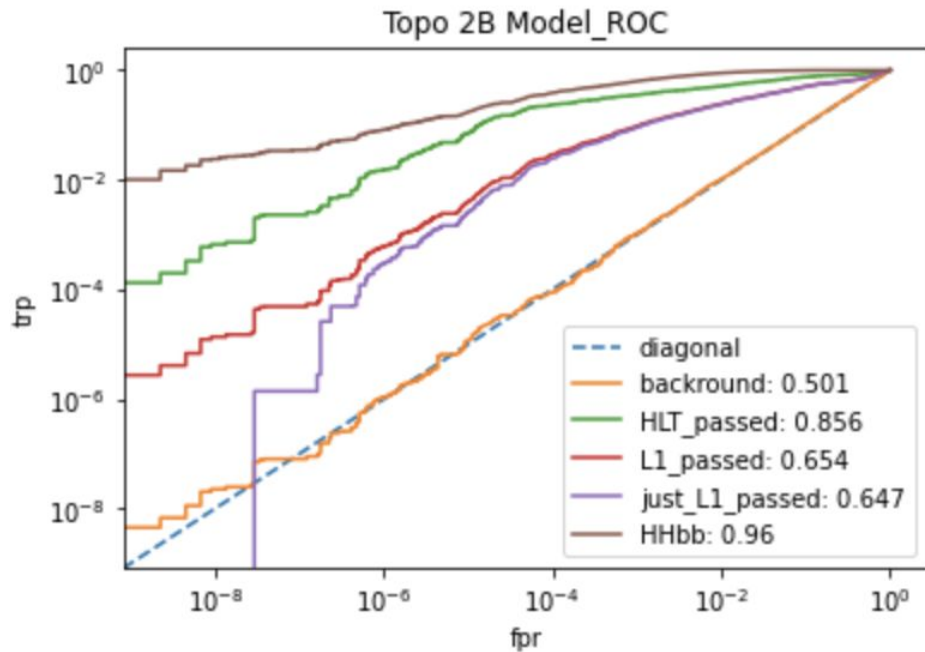

Topo 3A (Strawberry)

